



# DEEP CYCLE AGM TECHNOLOGY

## LDC12-105-G27-DT BCIGROUP 27

### FEATURES & BENEFITS

- True deep cycle AGM technology-GREEN SOLUTION
- Over 99.99% virgin lead for grid plate and active material
- Heavy duty grid/paste design for deep cycle application
- Maintenance free, non-spillable, valve-regulated
- Double separator configuration: long cycle life & High energy density and super anti-vibration design
- Low self-discharge for longer shelf life



### ELECTRICAL SPECIFICATIONS

Voltage(V)	Capacity (AH)					Reserve Capacity (Min)		
	100HR	20HR	10HR	5HR	3HR	@25A	@56A	@75A
12	115	108	104	96	90	220	80	55

### PHYSICAL SPECIFICATIONS

Model	Dimensions (mm/inches)				Weight (kg/lbs)	Terminal Type (Standard)	Case Material
	Length	Width	Height	Total Height			
LDC12-105-G27-DT	306 (12.05)	168 (6.61)	208 (8.19)	233 (9.17)	27.9 (61.5)	DT-5/16	ABS

Operating Temperature Range		
Discharge	Charge	Storage
-15°C ~ 50°C (5°F ~ 122°F)	0°C ~ 40°C (32°F ~ 104°F)	-15°C ~ 40°C (5°F ~ 104°F)



TS16949

ISO14001


ISO9001

OHSAS18001

DEEP CYCLE AGM BATTERY

# LDC12-105-G27-DT


## DIMENSIONS

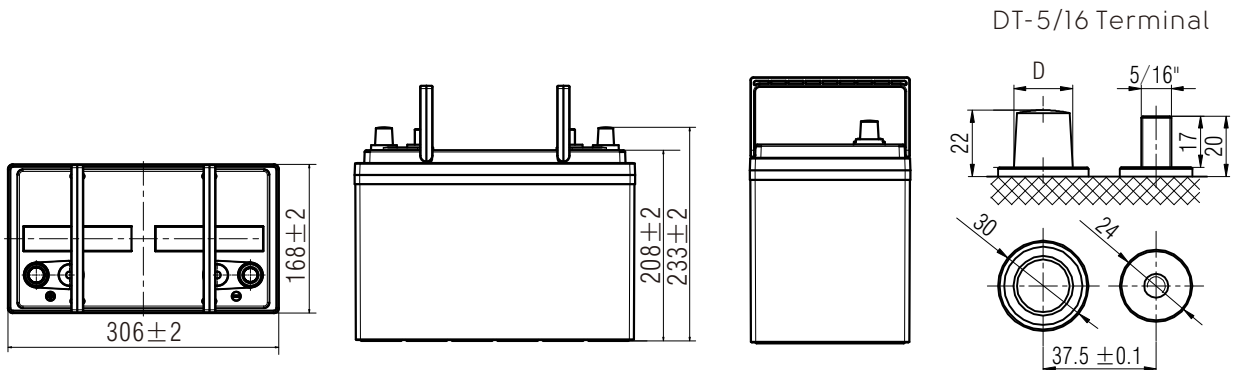


Note: D:Positive 19.5<sup>0</sup><sub>-0.3</sub>, D:Negative 17.9<sup>0</sup><sub>-0.3</sub>; Terminal Torque Values in-lb(Nm) :176-203(20-23)

## PERFORMANCE CHARACTERISTICS


### LEOCH LDC AGM Charging Profile

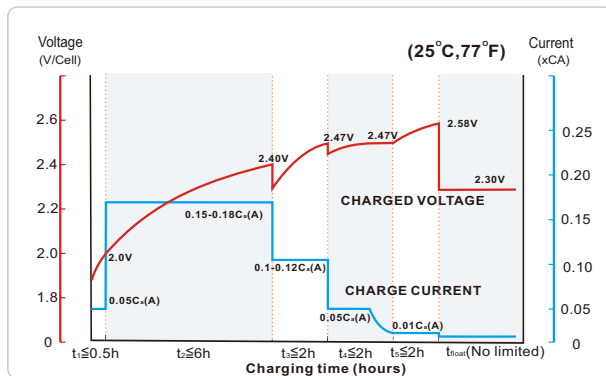


### Relationship of OCV and State Of Charge (25°C, 77°F)

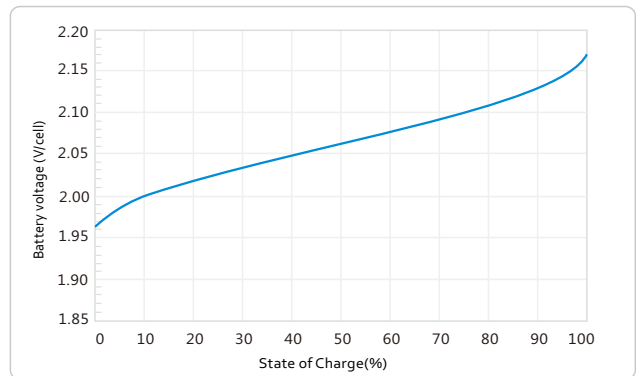

### Cycle life in relation to Depth Of Discharge

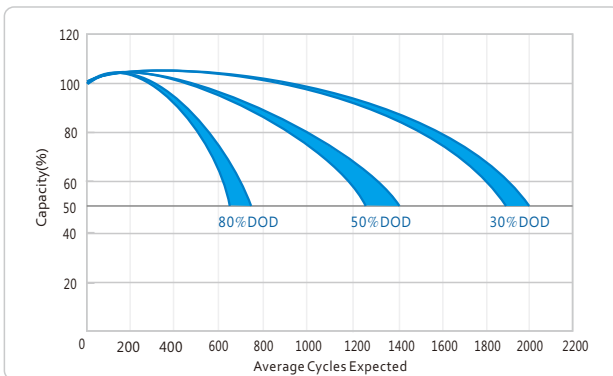

### Self-discharge Characteristic

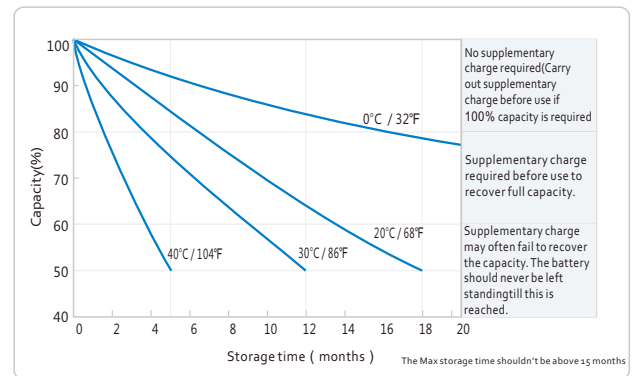

● LEOCH INTERNATIONAL SALES OFFICE:  
 Add: 5th Floor, Xinbaohui Bldg.  
 Nanhai Blvd, Nanshan, Shenzhen, China. 518054  
 Tel: +86-755-86036060(100 lines) Fax: +86-755-26067269  
 E-mail: export@leoch.com  
 web: www.leoch.com

© 2018 LEOCH. All rights reserved. Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted. Subject to revisions without prior notice.

Publication No: LB-LDC-PD-EN-V1.0-201807